



LG VX6100 Backcase Replacement

This guide explains how to remove and replace the backcase.

Written By: Teal





TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Backcase



- Push down on the gray "PUSH" button on the back side of the phone.
- Slide the back case downward. Then, lift and remove the case.

Step 2



- Lift up on the battery to remove it from the case.

Step 3




- Locate two gray plugs as indicated. Using a push-pin or tweezers, pry both of these plugs out.

Step 4



- Use a Phillips #00 screwdriver to unscrew the six screws as indicated.

Step 5

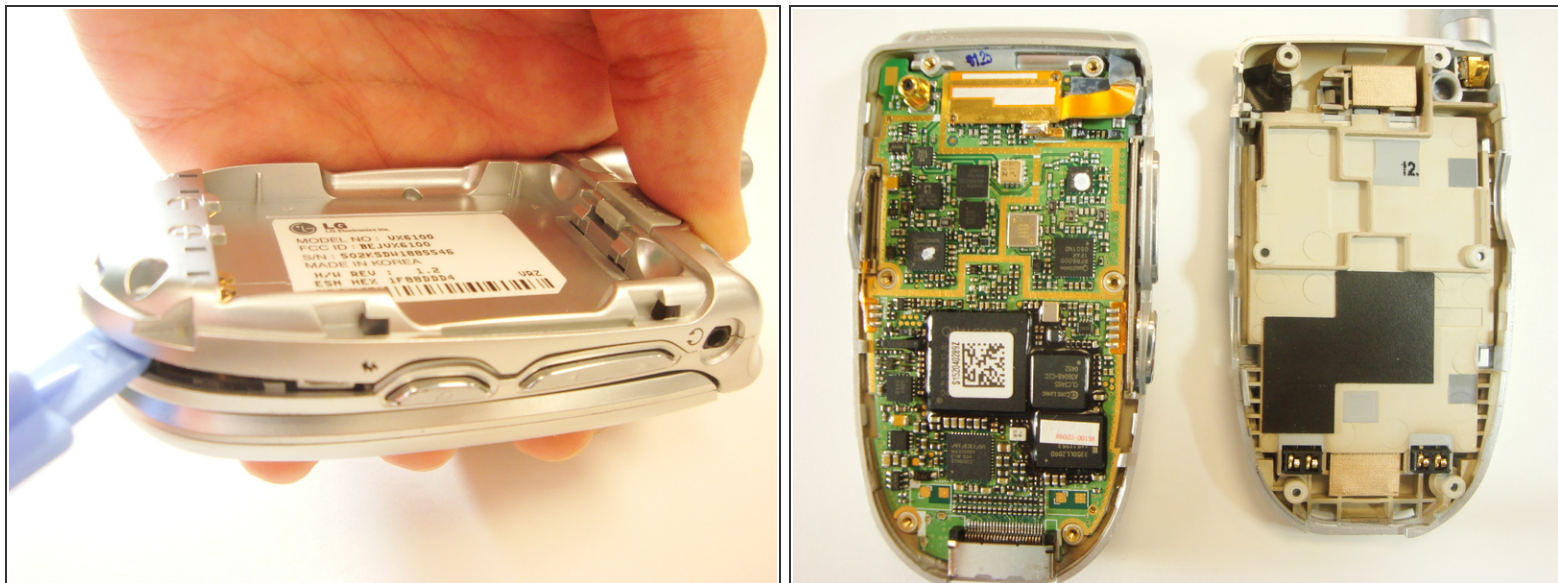

- Insert a plastic opener tool through the seam between the back case and the rest of the phone.
- Slowly slide the tool along the seam. Lift up on the back case while you do this until the back case comes apart.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-25 04:59:50 AM.